

PD 360/24 BASIC FM

Item number

EB10431739

GTIN

4015120431739



Product description

- Presence detector with **360° field of detection** For ceiling mounting
- **Range of up to 24 m** in the diameter at a recommended installation height of 3 m
- 10 A high-performance relay
- Zero-cross switching for gentle switching
- Factory setting for immediate operational readiness

Offers special product features such as: Zero-cross switching

Technical data

GENERAL	
Device category	Ceiling-mounted presence detector
Product information	Please note the Explanation of circuit breaker in the download area of the product! Mounting position: Keep a safe distance of 5 m from radio antennas (e.g. WiFi access points).
User interface	Adjusting controller
Remote controllable	-
Conformity	CE, EAC, RoHS, SundaHus, WEEE
Warranty	5 years
ATTACHMENT	
Installation type	Recessed mounting
Installation position	Ceiling
Installation dimension	Installation depth: 90 mm, Ø 68 mm
Type of connection	Push terminal
Connectable wire cross section	1,5 - 2,5 mm ²
HOUSING	
Dimensions	Height/Depth 113 mm, Ø 101 mm
Weight	122 g
Material	UV-stabilised polycarbonate
Protection type	IP40
Permissible ambient temperature	0 °C...+50 °C
Relative humidity	5 - 93 %, non-condensing
Colour	white, similar to RAL 9010
ELECTRICAL VERSION	
Control system	ON/OFF
Protection class	II

Nominal voltage	230 V AC / 50 Hz
In-rush current	78 A / 5 ms
Power consumption	0,2 W

SENSORS

Detection angle	360°
Detection range diagonally	Ø 24 m
Detection range head-on	Ø 8 m
Detection range presence	Ø 6 m
Field of detection	up to 453 m ²
Recommended installation height	3 m
Max. mounting height	5 m
Light measurement	mixed light
Level of brightness	5 - 2000 lx

CHANNELS (LIGHTING / HVAC)

Number of light channels	1
Push button input lighting	1
Push button input HVAC	-
Number of parallel switchable detectors	8
Slave input	-
Mode	Fully automatic
Switching delay from "dark to light"	300 s
Switching delay from "light to dark"	30 s
Constant light control	-
Channel	C1 Lighting
Function	Switching
Switching capacity	230 V/50 Hz 2300 W/10 A (cos phi = 1) 1150 VA/5 A (cos phi = 0,5)

PD 360/24 BASIC FM

Item number	GTIN
EB10431739	4015120431739


	600 W LED
Switch contact	make contact / non-floating
Push button input	✓

Impulse mode	✓
Switch-off delay time	15 s...30 min (adjustable in steps)


Accessories

Product designation	Item number	Product description	GTIN
Cover			
BASIC 24 LENS MASK	EB10423109	Lens mask 24 m	4015120423109
Electrical accessories			
FILTER 230 V	EP10426988	Filter for suppression of inductive loads, such as relays, contactors, fluorescent lamps and transformers	4015120426988
Protection			
BASKET GUARD ROUND LARGE	EM10425608	Basket guard for presence and motion detectors and smoke detectors, Ø 180 mm, height 90 mm	4015120425608

Dimension drawing




Field of detections



Detection range

Diagonally (A)	Ø 24 m
Frontal (B)	Ø 8 m
Presence area (C)	Ø 6 m

Circuit diagram

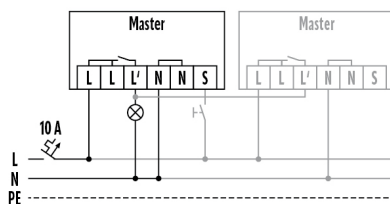

Standard with optional control via a closing button and parallel wiring of max. six devices.

PD 360/24 BASIC FM

Item number	GTIN
EB10431739	4015120431739

Detailed product description

- Presence detector with **360° field of detection** For ceiling mounting
- **Range of up to 24 m** in the diameter at a recommended installation height of 3 m
- 10 A high-performance relay
- Zero-cross switching: Extension of the service life of the relay and bulbs with electronic ballasts (e.g. fluorescent lamps, LED) thanks to more gentle switching in zero-cross switching.
- Factory setting for immediate operational readiness
- Automatic light control depending on presence and daylight
- Additional switch input
- Standard version as surface-mounted device, recessed ceiling mounting possible with accessories
- Sensing range upgrade through parallel connection