


TECHNICAL DATA

Voltage	12.00 V
Performance	9Ah C20 to 1.75V/cell at 25°C
Float Voltage	2.27V/cell at 20°C
Connection torque	na
Max Charge Current	2.25 A
Weight (Typical)	2.7 KG

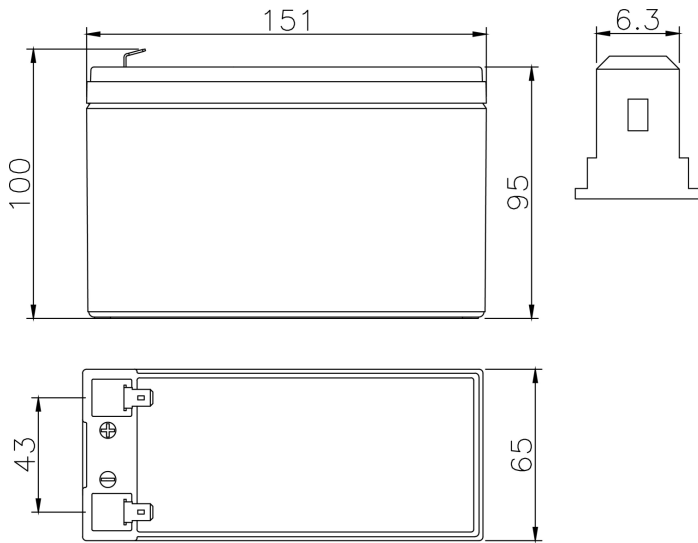

ELECTRICAL PERFORMANCES

Constant Current Discharge Table [A] at 20°C

V / cell	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	4 h	5 h	6 h	8 h	10 h
1,60	38,8	26,5	19,8	11,2	7,88	5,79	3,13	2,20		1,44			0,85
1,65	38,4	26,2	19,5	11,1	7,83	5,75	3,10	2,19		1,43			0,85
1,67	38,2	26,0	19,4	11,1	7,80	5,73	3,09	2,17		1,42			0,85
1,70	37,9	25,8	19,1	11,0	7,75	5,69	3,06	2,15		1,41			0,84
1,75	37,2	25,3	18,6	10,8	7,63	5,59	2,98	2,11		1,39			0,85
1,80	34,2	23,0	17,1	10,1	7,20	5,31	2,79	1,94		1,24			0,85
1,85													
1,90													

Constant Power Discharge Table [W/cell] at 25°C

V / cell	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	4 h	5 h	6 h	8 h	10 h
1,60	67,8	47,6	36,2	21,4	15,3	11,4	6,24	4,42		2,86			1,65
1,65	67,5	47,4	36,0	21,4	15,3	11,4	6,21	4,41		2,85			1,63
1,67	67,2	47,2	35,8	21,3	15,2	11,3	6,18	4,39		2,84			1,63
1,70	66,7	46,8	35,5	21,1	15,2	11,3	6,13	4,36		2,83			1,62
1,75	65,7	46,0	34,7	20,9	15,0	11,1	6,02	4,30		2,80			1,60
1,80	64,0	44,7	33,8	20,5	14,8	10,9	5,95	4,16		2,67			1,58
1,85	61,2	42,8	32,5	19,9	14,3	10,7	5,69	3,99		2,51			1,57
1,90													