


## LED line PRIME remote for a LED WIFI TUYA VARIANTE DIM/CCT/1-10V controller

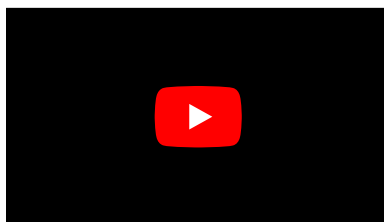

### VARIANTE DIM/CCT/1-10V Remote Control

The VARIANTE DIM/CCT/1-10V remote control is a device used to control VARIANTE DIM, VARIANTE CCT, and VARIANTE 1-10V controllers.

#### Features:

- **Unlimited controller grouping capability:** The VARIANTE remote has a unique interface and is very easy to use. Thanks to the grouping function, you can assign any number of VARIANTE DIM, CCT, or 1-10V controllers to it.
- **Favorite lighting scenes always at hand:** The remote control allows you to program any user lighting scenes directly accessible under the DIY1 and DIY2 buttons. The light intensity can also be selected by touch using the setting field.
- **Precise control:** Use the - + buttons to precisely adjust the brightness level of the LED strip or 1-10V luminaire. Long pressing will cause a smooth and rapid change in brightness.
- **Security:** Each VARIANTE remote is paired with the controller by the user using a unique code value. This way, you can avoid accidental interference, e.g. from neighbors.
- **Technical specifications:**
  - Range: up to 20m
  - Power supply: 2 AAA batteries (included)
  - Radio frequency: 2.4GHz
  - Allowable operating temperature: -20°C to 60°C
  - The set includes a practical wall mount for convenient remote control mounting.

#### Additional information:

The VARIANTE remote control is a safe and secure way to control your LED lighting. It is easy to use and has a wide range of features, making it ideal for both residential and commercial applications.



This product offers the benefit of controlling the light with the use of smartphone from any place in the world via IoT TUYA system. The user can control not only the brightness in the range of 0-100% but also the colour temperature in the range between 2700K and 6500K. These features place our product in the centre of the HCL (Human Centric Light)



Manufacturer issues a 5-year warranty for this product.



Voltage range and voltage type



Ambient temperature suitable for operation

Parameter	Value
Working power	<60 W
Standby power	75 uW

Parameter	Value
Working current	12,3 mA
Supply voltage range and voltage type	DC 3V 2*AAA

Warranty (years)	5
RF distance	20 m
RF frequency	2.4 GHz
Number of zones	4
Standby current	25 uA

Ambient temperature suitable for operation	-20÷60 °C
Length	138 mm
Width	19 mm
Height	19 mm

**Single packaging**




Width 50 mm  
Height 35 mm  
Length 150 mm  
Weight 0,106 kg  
1

**Bulk packaging**



Outer box quantity 100 pcs.  
5  
Width 340 mm  
300  
Length 390 mm  
Weight 11,4 kg  
Volume 0,03978 m<sup>3</sup>

**Europallet**



Weight of a euro pallet 36  
421 kg  
1800  
6  
5