

SIGNAL

Technical datasheet

Exit signs


Ref. SG-S-K



EN 60598-1
230V 50/60HZ

Exit signs: SIGNAL. Reference: SG-S-K, manufactured by Normalux. Lumens 85 lm. Operating mode: Maintained. Installation: Surface Mounting. Light source: Led. IP: 20. IK: 04. Version: CBS (230V AC). Color: White. Casing: Polycarbonate. Voltage: 230V 50/60Hz. Manufactured according EN 60598-1 regulations.

Dimensions (mm):

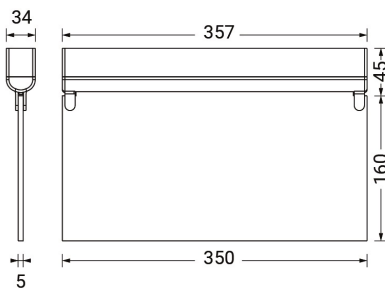

INFORMACIÓN SOBRE PICTOGRAMAS
PICTOGRAM INFO



SG-NR | Pictograma reversible izquierda/derecha
SG-NR | Reversible pictogram left/right



SG-ND | Pictograma dirección cambio nivel (inferior)
SG-ND | Pictogram down (change of level)



SG-SU | Pictograma dirección adelante
SG-SU | Pictogram direction straight



SG-NW | Pictograma blanco
SG-NW | White pictogram

Lumens	85 lm
Color temperatures (K)	5700
Light source	Led
Power (W)	1,8W
Operating mode	Maintained
Class	II
IP	20
IK	04
Operating temperature (°C)	-25 to 55
Remote control	No

* According to EN 1838 regulations

Photometric data:

