


2010-2A-ZI-40

Addressable fire panel component, LED indicator, 40 zones

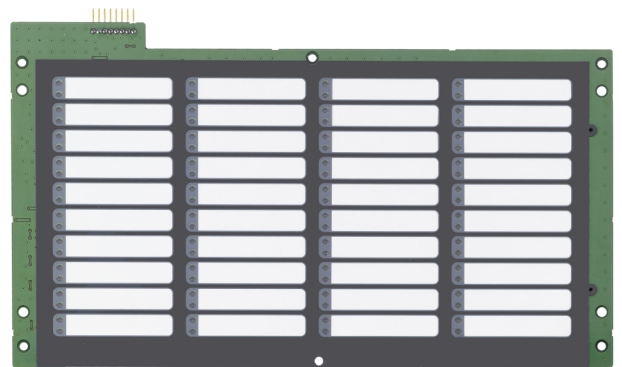

Details

- 40 zones
- 1 fire and 1 fault LED per zone
- Ample space for text
- Addressable fire panel component, LED indicator, 40 zone
- Suitable for big panel 2X-A and ZP2-A series

2010-2A-ZI-40

Addressable fire panel component, LED indicator, 40 zones

Technical specifications

Zone

Maximum zone capacity up to 40

Physical

Form factor Large

Physical dimensions 191 x 60 x 325 mm (W x H x D)

Net weight 180 g

Shipping weight 320 g

Mounting type In cabinet

Regulatory

Compliancy CPD, RoHS, WEEE

Certification EN54-2, EN54-4



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 16 February 2024 - 13:56